

ASK ABOUT OUR



TOG SPACE SAVER

TOG Industrial Features


- Compaction force of a stationary compactor that fits in areas with limited available space. CP-711-FL4 or FL6 requires only an 8 ' x 12' operation area.
- Container Sizes in 4, 6 and 8 cubic yard capacity front load or rear load styles
- Spill lip on the container catches waste that can fall from the compaction chamber when the container is removed. The result is a cleaner waste handling area.
- Front load containers are equipped with an easy latching system for attaching or removing the container to the compactor and an automatic lid locking/ unlocking system when emptying the container.
- Rear load containers are attached to the compactor with ratchet binders and the lid is fastened with manual drop hooks.
- · Meets or Exceeds Current ANSI Z245 Safety Standards

TOG Rental Plan

- Compactor Rental Plan
- Choice of Maintenance Plans
- 100% Tax Deductible
- Biodegradable Oil Options
- 99% Run-Time Reliability
- Paper and Plastics Recycling
- Access to TOG Advisory Services
- Access to On-Going Service Management
- Optional Door-Seal Protection Plan

Specifications

CP-711

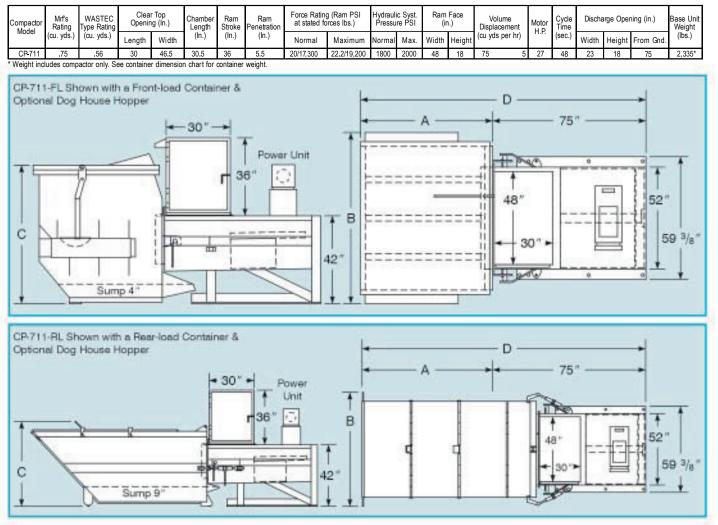

Standard Features

otanuaru	i cature	3					
• Frame:	Floor Side		Ram:	Face Floor	3/8 " 3/8 "		
	Breake			Тор	3/16"		
		x 6 " x 1"		Sides	3/16"		
 Removab 				Oluco	5/10		
•Weatherh			-				
Choice of		,		inor			
		ainer Lock					
		ng Mecha	inism witi	na			
	Load Co						
		Hooks wit	h a Rear	Load			
Conta							
 Power Ur 				npactor			
 Reservoir 	:: 15 Gall	lon Capac	ity				
•Oil - Suita	able for \	Nide Tem	perature	Range			
 Oil Sight 	Gauge w	v/Thermor	neter				
•Pump: 6	GPM,						
	Constan	t Displace	ement Va	ine Type			
 Cylinder: 	3.5" Bo	re x 2 Rc	od x 36 "	Stroke			
•UL Listed	Electric	al Compo	nents				
•Motor: 5							
Controls							
Automat							
		Retract					
		tic Shut-of	ff w/Indic	ator			
			ii windlo				
Key Lock On/Off Switch							

Pull-To-Start/Emergency Push-To-Stop Button

Optional Features

- •Decks 750# Capacity
- •Safety Handrails
- •Safety Gate w/Interlock
- •Side or Rear Load Hopper
- •Enclosed Hopper with Door
- •Security Chute (Side or Rear)
- Safety Interlock System
- •Deodorizer Spray System
- •UL Certified Panel
- •Photo Electric Start System
- Jog Controls
- ·Advance Full Load Indicator
- •TEFC Motor
- Low Oil Indicator with Shut-off
- •Thermo Oil Heater
- Power Unit Weather Cover
 Ratchet Binders and Hooks
 Cotting of the South Local South Continued and South Continued
- (Optional w/a Front Load Container)

Ask Your Local Dealer For Additional Options

Container Dimensions and Overall Length

Front Load								
Capacity	Α	в	С	D	Weight			
4	54	80	55	129	1440			
6	62	80	68	137	1665			
8	74	80	82	149	1860			
Rear Load								
4	94	77.5	58	169	1600			
6	128	77.5	58	203	1790			
8	162	77.5	58	237	2250			

CAUTION: This equipment Should Be Operated By Properly Trained Personnel. Improper Use, Misuse or Lack of maintenance could cause injury to people and/or properly. Photos used in this brochure are illustrative only. Due to its commitment to quality, TOG specifications are subject to change without notice to accommodate improvements to its equipment. Information contained within this literature is intended to be the most accurate available at the time of printing.





17 Bank Street P.O. Box 1240 Attleboro, MA 02703-0240 888-680-8644 Fax: 508-222-0757 email: sales@theokeefegroupinc.com www.tog.us.com