



Apartment Compactor

Model APT-331

1/3 cu. yd. Stationary Compactor

TOG Industrial Features

- Designed for chute or drop in waste collection.
 Great for high rise and office building applications.
- Limited Space Applications Compactor and container system can be easily operated in a 16' x 8' room.
- Automatic photo-eye start system compactor cycles automatically when the chamber is full.
- Large waste chute transition hopper standard.
 Allows for garbage to "hit" the spot with less mess around the compactor.
- Reduce hauling costs compacted wastes means fewer pickups.
- Outperforms and outlasts all other stationary compactors in its class.


TOG Rental Program Benefits

- Compactor Rental Plan
- Choice of Maintenance Plans
- 100% Tax Deductible
- Biodegradable Oil Options
- 99% Run-Time Reliability
- Paper and Plastics Recycling
- Access to TOG Advisory Service
- Access to On-Going Service Mgmt.
- Optional Door-Seal Protection Plan

Specifications

Model APT-331

Compactor Model	Mrf's Rating (cu. yds.)	WASTEC Type Rating (cu. yds.)	Clear Top Opening (In.)		Chamb- er	Ram Stroke	Ram Penetrati	Force Rating (Ram PSI at stated forces lbs.)		Hydraulic Syst. Pressure PSI		Ram Face (in.)		Volume Displacement	MOTOL	Time	Discharge Opening (in.		Unit	
			Length	Width	(ln.)	(ln.)	on (ln.)	Normal	Maximum	Normal	Max.	Width	Height	(cu. yds. per H.P.	n.P.	(sec.)	Width	Height	From Gnd.	Weight (lbs.)
APT-331	.33	.29	24	28.5	24.5	30	5.5	41.2/18,80- 0	49.6/22,60 0	1,500	1,800	30	19	33	5	26	30.5	23.7	12.5	1,855

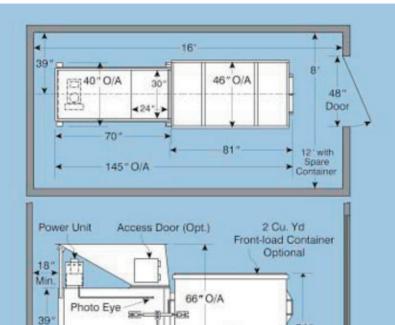

70



Conforms to Current ANSI Z245.2 and **OSHA Safety Standards**

Drawing with Optional 2 cu. yd. Rear-Load Container Dimension 81"L x 46"W x 53"H

·Frame: Floor (3) C3 x 4.1# & (1) C4 x 5.4# Floor Supports Side Plates Breaker Bar L 4" x 3" x 1/2" Face Plate ·Ram: 3/8" Floor Plate 3/8 Side Plates 3/16" Top Plate 1/4" Top Supports (6) C3 x 4.1# Hopper: Side & Front 1/8" Bottom 3/8"

- Ratchet Binder/Hooks: 48,000# Capacity
- Deck Mounted Power Unit
- Reservoir: 15 Gallon Capacity
- ·Oil Suitable for Wide Temperature Range
- Oil Sight Gauge w/Thermometer
- Pump: 6 GPM, Constant Displacement Vane Type
- Cylinder: (1) 4" Bore x 2.5" Rod x 30" Stroke
- UL Listed Electrical Components
- ·Motor: 5 HP Tri-Volt 3 Phase
- Controls Mounted in Main Panel

Automatic Multicycle Automatic Safety Retract

Photo Electric Start System

Full/Jam Automatic Shut-off w/Warning Light

Key Lock On/Off Switch

Pull-to-Start/Emergency Push-To-Stop Buton

·Removable Access Pane ·Weatherhood/Safety Panels

Apartment Transition Hopper

Optional Features

- ·Clean-Out Door in Transition Hopper
- ·Side or Rear Load Hopper
- Enclosed Hopper with Door
- ·Security Chute (Side or Rear)
- ·Safety Interlock System
- Deodorizer Spray System
- UL Certified Panel
- TEFC Motor
- Oil Pressure Gauge
- •Remote Power Unit

Automatic Cycle System

Ram Position Switch

Manual Sustained Pressure Switch

Advance Full Load Indicator

- Programmed Cycle System
- Single Phase Motor System
- Low Oil Indicator with Shut-off
- Thermo Oil Heater
- Power Unit Weather Cover
- Container Guide System
- Through Wall Ratchet Kit

CAUTION! This Equipment Should Be Operated By Properly Trained Personnel. Improper Use, Misuse or Lack of Maintenance could cause injury to people and/or property. Photos used in this brochure are illustrative only. Due to its commitment to quality, TOG specifications are subject to change without notice to accommodate improvements to its equipment. Information contained within this literature is intended to be the most accurate available at the time of printing

CUSTOM-DESIGNED EQUIPMENT

- Balers
- Cart Dumpers
- Compactors
- Pre-Crushers
- Fluid Recovery Units Self-Contained Units
- Trailer Restraints
- Transfer Stations
- Food Waste Units Newsprint Loaders



TOG Equipment Leasing, LLC 17 Bank Street Attleboro, MA 02703-0240 Tel. 888-680-8644 Fax. 508-222-0757 www.compactorleasing.com sales@theokeefegroupinc.com